

# OnPortal™ Lock Management System


**Electronic Locking Solutions** 

OnPortal is Onity's latest lock management system, brilliantly designed to deliver optimal efficiency and guest satisfaction. A scalable solution, it offers full access management from a desktop PC and great flexibility thanks to its roving check-in option with a touch-friendly tablet .

Fully-featured and easy to use, OnPortal is a powerful system which enhances the check-in process, making it faster. Your staff can perform at optimum efficiency, and your guests will appreciate you making their personal comfort and security a top priority.

All Onity products are backed by a strong commitment to provide the highest standards of service for the customer. Onity's technical department will ensure that you get the support you need, when you need it.

- □ User friendly software: easy to learn, easy to use
   □ Scalable, designed to support small to large properties of up to 6000 rooms
   □ Works with the latest Microsoft Windows® OS
   □ Developed using the latest security standards
   □ Compatible with magstripe, chip and RFID (13.56 MHz MIFARE® Classic/EV1, Plus or Ultralight C) technologies
- ☐ Creates and manages mobile and physical key credentials; Onity's DirectKey<sup>TM</sup> mobile key solution allows guests to use their smartphone as the door key, either for independent hotels or properties with brand app integration
- ☐ Multiple USB encoder and multiple stations
- ☐ Multi-sector RFID encoding, multi-track magstripe for effective interfacing to third party systems
- □ Direct interface with PMS or POS systems
- ☐ Multi-thread PMS interface capabilities
- □ Provides staff shift time tables
- Role-based access to the software, allowing users to perform only the required tasks
- □ Any tablet or laptop PC with Windows<sup>®</sup> installed can be used as Portable Programmer
- Manages all Onity hospitality locks and readers, backwards compatible
- ☐ Able to also control a wide range of other Onity options: in-room safes, energy saving devices, wall readers etc.
- Phased migration path; easy upgrade, enabling gradual equipment replacement
- □ SQL Server Compact Edition platform embedded
- $\hfill \square$  Compatible with remote encoding and kiosk
- □ Easy reporting to CSV files

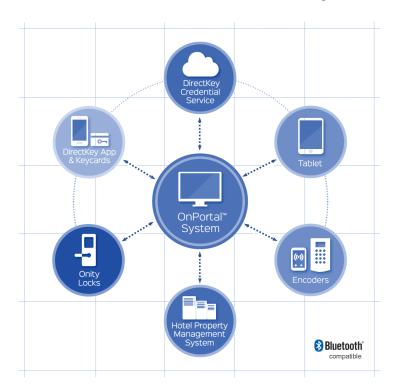





# OnPortal™ Encoders Lock Management System

**Electronic Locking Solutions** 

OnPortal, Onity's latest lock management solution, works with 3 encoder models; with minimal hardware footprint, they are very convenient saving space at reception.

#### **OnPortal RFID Encoder**

Contactless device which enables to read and write to RFID cards and tags.

- □ Technology: reads/writes MIFARE® Classic/EV1, Plus, and Ultralight C
- ☐ Read/write capacity: up to 100 mm, depending on environment and transponder
- □ Communication: USB interface
- ☐ Transmission speed: USB full speed (12Mbit/s), high frequency air up to 848 Kbit/s
- □ Compliant with standards: ISO14443A/B, FCC, CE, IC, RoHS-II
- ☐ Power: 4.3 5.5 V via USB
- □ Compatible with virtually any 13.56 MHz devices
- □ Dimensions: 18 x 56 x 88 mm (H x W x D)



## **OnPortal Motorized Encoder**

Motorized card reader/writer terminal which encodes data on triple tracks of magstripe cards.

- ☐ Technology: reads/writes high (Hi-Co) and low (Lo-Co) coercivity magstripe cards
- □ Communication: USB interface
- ☐ Compliant with standard: ISO7810/7811 for magstripe
- Incorporates a built-in power supply and LEDs which indicate operation status
- □ Power: AC 110 220 V, 50 60 Hz
- □ Life time:

Magnetic head: Min. 2,000,000 cyclesIC Contacts: Min. 700,000 contacts

- ☐ Feeding speed: 280 mm/s 20%
- $\hfill\Box$  Dimensions: 100 x 148 x 225 mm (H x W x D)

## **OnPortal Insertion Encoder**

Single track magstripe card insertion encoding device with USB interface.

- ☐ Technology: reads/writes low (Lo-Co) coercivity magstripe
- □ Communication: USB interface
- ☐ Transmission speed: USB full speed (12 Mbit/s)
- □ Compliant with standard: ISO7810, 7811
- □ Power: 4.3 5.5 V via USB
- ☐ Stand available for ease of use
- ☐ Dimensions: 111.5 x 95 x 45 mm (H x W x D)